

## Bioretention Facilities

Bioretention facilities are engineered facilities that store and treat stormwater by filtering it through a specified soil profile. Water that enters the facility ponds in an earthen depression or other basin (e.g., concrete planter) before it infiltrates into the underlying bioretention soil. Stormwater that exceeds the surface storage capacity overflows to an adjacent drainage system. Treated water is either infiltrated into the underlying native soil or collected by an underdrain and discharged. Bioretention facilities are considered Stormwater Treatment and Flow Control BMPs/Facilities when used to help meet Minimum Requirements #6 (treatment), #7 (flow control), or both.

### *Key Maintenance Considerations*

The main components of bioretention facilities are listed below with descriptions of their function and key maintenance considerations.

- **Inlet:** Stormwater can flow into a bioretention facility in a number of ways including: dispersed flow across vegetated areas, sheet flow across impervious areas, or concentrated flow through curb cuts and/or piped flow inlets. Inlets must be maintained to be unobstructed to ensure that stormwater enters the facility as designed. Erosion control measures must also be maintained in areas of concentrated flows (e.g., pipes inlets or narrow curb cuts).
- **Facility footprint:** The facility footprint is typically an earthen depression or another type of basin (e.g., concrete planter box) that provides surface storage for stormwater before it infiltrates into the underlying bioretention soil. If the facility is located on a slope, low permeability check dams may be included (oriented perpendicular to the slope) to encourage ponding. Key maintenance considerations for the facility footprint include the following:
  - The integrity of earthen berms and basin walls must be maintained, soil areas must be protected from erosion, and accumulated sediment must be removed.
  - Bioretention facilities are designed to infiltrate all ponded water within a 24- to 48-hour “drawdown” time after the end of a storm. This allows the soil to dry out periodically in order to restore the hydraulic capacity of the system and prevent conditions supportive of mosquito breeding. Slower drawdown times may indicate that the underdrain (if present) is plugged or the bioretention soil is overly compacted, clogged, or does not meet design specifications. Corrective maintenance may include clearing underdrain obstructions or partial or complete replacement of bioretention soil to restore bioretention facility function.
- **Bioretention soil:** Infiltration of stormwater through the engineered bioretention soil mix provides water quality treatment. All maintenance activities must be performed in a manner to prevent compaction of the bioretention soil.
- **Mulch:** The bioretention soil is covered by a layer of mulch, comprised of arborist wood chips, compost, and/or rocks. Mulch reduces weed establishment. Organic

mulches regulate soil temperatures and moisture, and add organic matter to soil. The mulch layer must be supplemented regularly.

- **Vegetation:** Bioretention systems rely on vegetation (i.e., grasses, shrubs, and sometimes trees) to intercept, uptake, and evapotranspire stormwater. In addition, plant roots improve soil structure and increase infiltration capacity. Regular maintenance activities associated with vegetation include weeding and pruning. Plants also require irrigation during the first 2 to 3 years of establishment and during extended dry periods.
- **Overflow:** Flows exceeding the capacity of the facility are discharged via an overflow structure (e.g., pipe, curb cut, earthen channel). It is important to maintain clear outlet pipes and overflow structures to ensure that stormwater can be safely conveyed to a designated discharge point (e.g., storm drain system).
- **Underdrains (optional):** Underdrains are optional components of a bioretention facility that may be included in bioretention systems where, for example, infiltration to underlying soil is not prudent or feasible. Underdrains are installed under the bioretention soil layer to collect and convey treated water. An underdrain system can be comprised of perforated or slotted pipe, wrapped in an aggregate blanket. It is important to maintain clear drains so that water moves through system as designed. Maintenance may include occasional cleaning to remove plant roots or debris. If underdrains are equipped with a flow restrictor (e.g., orifice) to attenuate flows, the orifice must be inspected and cleaned regularly.

Nutrient sensitivity of the receiving water is also an important maintenance consideration, particularly in watersheds draining to phosphorous limited water bodies. The addition of excess fertilizers to the system and/or systems operating in bypass, can increase the potential for export of phosphorous found in bioretention soil or compost and increase nutrient loads to downstream receiving waters.

### *Key Operations to Preserve Facility Function*

For a bioretention system to function properly, stormwater must infiltrate freely through the bioretention soil. The soil infiltration rate can be reduced if the soil is subject to compaction (e.g., foot and vehicle traffic loads). To limit the likelihood of corrective maintenance (e.g., bioretention soil replacement), the facility footprint area should be protected from external loads. Because the risk of compaction is higher when soils are saturated, any type of loading in the bioretention facility (including foot traffic) should be avoided during wet conditions.

Signage can also be used to identify the vegetated area as a stormwater BMP and inform maintenance crews and the general public about protecting the facility's function.

### *Maintenance Standards and Procedures*

Table 3 provides the recommended maintenance frequencies, standards, and procedures for bioretention facility components. The level of routine maintenance required and the frequency of corrective maintenance actions may increase for facilities subject to high sediment loads from the contributing drainage area.

Table 3. Maintenance Standards and Procedures for Bioretention Facilities.					
Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)	
	Inspection	Routine Maintenance			
Facility Footprint					
Earthen side slopes and berms	B, S		Erosion (gullies/ rills) greater than 2 inches deep around inlets, outlet, and alongside slopes	<ul style="list-style-type: none"><li>• Eliminate cause of erosion and stabilize damaged area (regrade, rock, vegetation, erosion control matting)</li><li>• For deep channels or cuts (over 3 inches in ponding depth), temporary erosion control measures should be put in place until permanent repairs can be made.</li><li>• Properly designed, constructed and established facilities with appropriate flow velocities should not have erosion problems except perhaps in extreme events. If erosion problems persist, the following should be reassessed: (1) flow volumes from contributing areas and bioretention facility sizing; (2) flow velocities and gradients within the facility; and (3) flow dissipation and erosion protection strategies at the facility inlet.</li></ul>	
		A		Erosion of sides causes slope to become a hazard	Take actions to eliminate the hazard and stabilize slopes
		A, S		Settlement greater than 3 inches (relative to undisturbed sections of berm)	Restore to design height
		A, S		Downstream face of berm wet, seeps or leaks evident	Plug any holes and compact berm (may require consultation with engineer, particularly for larger berms)
	A		Any evidence of rodent holes or water piping in berm	<ul style="list-style-type: none"><li>• Eradicate rodents (see "Pest control")</li><li>• Fill holes and compact (may require consultation with engineer, particularly for larger berms)</li></ul>	
Concrete sidewalls	A		Cracks or failure of concrete sidewalls	<ul style="list-style-type: none"><li>• Repair/ seal cracks</li><li>• Replace if repair is insufficient</li></ul>	
Rockery sidewalls	A		Rockery side walls are insecure	Stabilize rockery sidewalls (may require consultation with engineer, particularly for walls 4 feet or greater in height)	
Facility area		All maintenance visits (at least biannually)	Trash and debris present	Clean out trash and debris	
Facility bottom area	A, S		Accumulated sediment to extent that infiltration rate is reduced (see "Ponded water") or surface storage capacity significantly impacted	<ul style="list-style-type: none"><li>• Remove excess sediment</li><li>• Replace any vegetation damaged or destroyed by sediment accumulation and removal</li><li>• Mulch newly planted vegetation</li><li>• Identify and control the sediment source (if feasible)</li><li>• If accumulated sediment is recurrent, consider adding presettlement or installing berms to create a forebay at the inlet</li></ul>	
		During/after fall leaf drop	Accumulated leaves in facility	Remove leaves if there is a risk to clogging outlet structure or water flow is impeded	
Low permeability check dams and weirs	A, S		Sediment, vegetation, or debris accumulated at or blocking (or having the potential to block) check dam, flow control weir or orifice	Clear the blockage	
	A, S		Erosion and/or undercutting present	Repair and take preventative measures to prevent future erosion and/or undercutting	
	A		Grade board or top of weir damaged or not level	Restore to level position	

<sup>a</sup> Frequency: A = Annually; B = Biannually (twice per year); M = Monthly; W = At least one visit should occur during the wet season (for debris/clog related maintenance, this inspection/maintenance visit should occur in the early fall, after deciduous trees have lost their leaves); S = Perform inspections after major storm events (24-hour storm event with a 10-year or greater recurrence interval).

IPM - Integrated Pest Management

ISA - International Society of Arboriculture

Table 3 (continued). Maintenance Standards and Procedures for Bioretention Facilities.				
Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
Facility Footprint (cont'd)				
Ponded water	B, S		Excessive ponding water. Water overflows during storms smaller than the design event or ponded water remains in the basin 48 hours or longer after the end of a storm.	Determine cause and resolve in the following order: 1) Confirm leaf or debris buildup in the bottom of the facility is not impeding infiltration. If necessary, remove leaf litter/debris. 2) Ensure that underdrain (if present) is not clogged. If necessary, clear underdrain. 3) Check for other water inputs (e.g., groundwater, illicit connections). 4) Verify that the facility is sized appropriately for the contributing area. Confirm that the contributing area has not increased. If steps #1-4 do not solve the problem, the bioretention soil is likely clogged by sediment accumulation at the surface or has become overly compacted. Dig a small hole to observe soil profile and identify compaction depth or clogging front to help determine the soil depth to be removed or otherwise rehabilitated (e.g., tilled). Consultation with an engineer is recommended.
Bioretention soil media	As needed		Bioretention soil media protection is needed when performing maintenance requiring entrance into the facility footprint	<ul style="list-style-type: none"><li>• Minimize all loading in the facility footprint (foot traffic and other loads) to the degree feasible in order to prevent compaction of bioretention soils.</li><li>• Never drive equipment or apply heavy loads in facility footprint.</li><li>• Because the risk of compaction is higher during saturated soil conditions, any type of loading in the cell (including foot traffic) should be minimized during wet conditions.</li><li>• Consider measures to distribute loading if heavy foot traffic is required or equipment must be placed in facility. As an example, boards may be placed across soil to distribute loads and minimize compaction.</li><li>• If compaction occurs, soil must be loosened or otherwise rehabilitated to original design state.</li></ul>
Inlets/Outlets/Pipes				
Splash block inlet	A		Water is not being directed properly to the facility and away from the inlet structure	Reconfigure/ repair blocks to direct water to facility and away from structure
Curb cut inlet/outlet	M during the wet season and before severe storm is forecasted	Weekly during fall leaf drop	Accumulated leaves at curb cuts	Clear leaves (particularly important for key inlets and low points along long, linear facilities)
Pipe inlet/outlet	A		Pipe is damaged	Repair/ replace
	W		Pipe is clogged	Remove roots or debris
	A, S		Sediment, debris, trash, or mulch reducing capacity of inlet/outlet	<ul style="list-style-type: none"><li>• Clear the blockage</li><li>• Identify the source of the blockage and take actions to prevent future blockages</li></ul>
		Weekly during fall leaf drop	Accumulated leaves at inlets/outlets	Clear leaves (particularly important for key inlets and low points along long, linear facilities)
Erosion control at inlet		A	Maintain access for inspections	<ul style="list-style-type: none"><li>• Clear vegetation (transplant vegetation when possible) within 1 foot of inlets and outlets, maintain access pathways</li><li>• Consultation with a landscape architect is recommended for removal, transplant, or substitution of plants</li></ul>
	A		Concentrated flows are causing erosion	Maintain a cover of rock or cobbles or other erosion protection measure (e.g., matting) to protect the ground where concentrated water enters the facility (e.g., a pipe, curb cut or swale)

<sup>a</sup> Frequency: A = Annually; B = Biannually (twice per year); M = Monthly; W = At least one visit should occur during the wet season (for debris/clog related maintenance, this inspection/maintenance visit should occur in the early fall, after deciduous trees have lost their leaves); S = Perform inspections after major storm events (24-hour storm event with a 10-year or greater recurrence interval).

IPM – Integrated Pest Management

ISA - International Society of Arboriculture

July 2013

Guidance Document–W. Washington Low Impact Development (LID) Operation and Maintenance (OBM)

Table 3 (continued). Maintenance Standards and Procedures for Bioretention Facilities.				
Component	Recommended Frequency *		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
Inlets/Outlets/Pipes (cont'd)				
Trash rack	S		Trash or other debris present on trash rack	Remove/dispose
	A		Bar screen damaged or missing	Repair/replace
Overflow	A, S		Capacity reduced by sediment or debris	Remove sediment or debris/dispose
Underdrain pipe	Clean pipe as needed	Clean orifice at least biannually (may need more frequent cleaning during wet season)	<ul style="list-style-type: none"><li>Plant roots, sediment or debris reducing capacity of underdrain</li><li>Prolonged surface ponding (see "Ponded water")</li></ul>	<ul style="list-style-type: none"><li>Jet clean or rotary cut debris/roots from underdrain(s)</li><li>If underdrains are equipped with a flow restrictor (e.g., orifice) to attenuate flows, the orifice must be cleaned regularly.</li></ul>
Vegetation				
Facility bottom area and upland slope vegetation	Fall and Spring		Vegetation survival rate falls below 75% within first two years of establishment (unless project O&M manual or record drawing stipulates more or less than 75% survival rate).	<ul style="list-style-type: none"><li>Determine cause of poor vegetation growth and correct condition</li><li>Replant as necessary to obtain 75% survival rate or greater. Refer to original planting plan, or approved jurisdictional species list for appropriate plant replacements (See Appendix 3 - Bioretention Plant List, in the LID Technical Guidance Manual for Puget Sound).</li><li>Confirm that plant selection is appropriate for site growing conditions</li><li>Consultation with a landscape architect is recommended for removal, transplant, or substitution of plants</li></ul>
Vegetation (general)	As needed		Presence of diseased plants and plant material	<ul style="list-style-type: none"><li>Remove any diseased plants or plant parts and dispose of in an approved location (e.g., commercial landfill) to avoid risk of spreading the disease to other plants</li><li>Disinfect gardening tools after pruning to prevent the spread of disease</li><li>See Pacific Northwest Plant Disease Management Handbook for information on disease recognition and for additional resources</li><li>Replant as necessary according to recommendations provided for "facility bottom area and upland slope vegetation".</li></ul>
Trees and shrubs		All pruning seasons (timing varies by species)	Pruning as needed	<ul style="list-style-type: none"><li>Prune trees and shrubs in a manner appropriate for each species. Pruning should be performed by landscape professionals familiar with proper pruning techniques</li><li>All pruning of mature trees should be performed by or under the direct guidance of an ISA certified arborist</li><li>Prune trees and shrubs using most current ANSI A300 standards and ISA BMPs.</li><li>Remove trees and shrubs, if necessary.</li></ul>
	A		Large trees and shrubs interfere with operation of the facility or access for maintenance	<ul style="list-style-type: none"><li>Remove standing dead vegetation</li><li>Replace dead vegetation within 30 days of reported dead and dying plants (as practical depending on weather/planting season)</li><li>If vegetation replacement is not feasible within 30 days, and absence of vegetation may result in erosion problems, temporary erosion control measures should be put in place immediately.</li><li>Determine cause of dead vegetation and address issue, if possible</li><li>If specific plants have a high mortality rate, assess the cause and replace with appropriate species. Consultation with a landscape architect is recommended.</li></ul>
	Fall and Spring		Standing dead vegetation is present	
	Fall and Spring		Planting beneath mature trees	<ul style="list-style-type: none"><li>When working around and below mature trees, follow the most current ANSI A300 standards and ISA BMPs to the extent practicable (e.g., take care to minimize any damage to tree roots and avoid compaction of soil).</li><li>Planting of small shrubs or groundcovers beneath mature trees may be desirable in some cases; such plantings should use mainly plants that come as burls, bare root or in 4-inch pots; plants should be in no larger than 1-gallon containers.</li></ul>

<sup>a</sup> Frequency: A = Annually; B = Biannually (twice per year); M = Monthly; W = At least one visit should occur during the wet season (for debris/clog related maintenance, this inspection/maintenance visit should occur in the early fall, after deciduous trees have lost their leaves); S = Perform inspections after major storm events (24-hour storm event with a 10-year or greater recurrence interval).

PM - Integrated Pest Management  
ISA - International Society of Arboriculture

July 2013

Guidance Document—W. Washington Low Impact Development (LID) Operation and Maintenance (O&M)

Table 3. (continued). Maintenance Standards and Procedures for Bioretention Facilities.				
Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
Vegetation (cont'd)				
Trees and shrubs (cont'd)	Fall and Spring		Planting beneath mature trees	<ul style="list-style-type: none"><li>When working around and below mature trees, follow the most current ANSI A300 standards and ISA BMPs to the extent practicable (e.g., take care to minimize any damage to tree roots and avoid compaction of soil).</li><li>Planting of small shrubs or groundcovers beneath mature trees may be desirable in some cases; such plantings should use mainly plants that come as bulbs, bare root or in 4-inch pots; plants should be in no larger than 1-gallon containers.</li></ul>
	Fall and Spring		Presence of or need for stakes and guys (tree growth, maturation, and support needs)	<ul style="list-style-type: none"><li>Verify location of facility liners and underdrain (if any) prior to stake installation in order to prevent liner puncture or pipe damage</li><li>Monitor tree support systems; Repair and adjust as needed to provide support and prevent damage to tree.</li><li>Remove tree supports (stakes, guys, etc.) after one growing season or maximum of 1 year.</li><li>Backfill stake holes after removal.</li></ul>
Trees and shrubs adjacent to vehicle travel areas (or areas where visibility needs to be maintained)	A		Vegetation causes some visibility (line of sight) or driver safety issues	<ul style="list-style-type: none"><li>Maintain appropriate height for sight clearance</li><li>When continued, regular pruning (more than one time/growing season) is required to maintain visual sight lines for safety or clearance along a walk or drive, consider relocating the plant to a more appropriate location.</li><li>Remove or transplant if continual safety hazard</li><li>Consultation with a landscape architect is recommended for removal, transplant, or substitution of plants</li></ul>
Flowering plants		A	Dead or spent flowers present	Remove spent flowers (deadhead)
Perennials		Fall	Spent plants	Cut back, dying or dead and fallen foliage and stems
Emergent vegetation		Spring	Vegetation compromises conveyance	<ul style="list-style-type: none"><li>Hand rake sedges and rushes with a small rake or fingers to remove dead foliage before new growth emerges in spring or earlier only if the foliage is blocking water flow (sedges and rushes do not respond well to pruning)</li></ul>
Ornamental grasses (perennial)		Winter and Spring	Dead material from previous year's growing cycle or dead collapsed foliage	<ul style="list-style-type: none"><li>Leave dry foliage for winter interest</li><li>Hand rake with a small rake or fingers to remove dead foliage back to within several inches from the soil before new growth emerges in spring or earlier if the foliage collapses and is blocking water flow</li></ul>
Ornamental grasses (evergreen)		Fall and Spring	Dead growth present in spring	<ul style="list-style-type: none"><li>Hand rake with a small rake or fingers to remove dead growth before new growth emerges in spring</li><li>Clean, rake, and comb grasses when they become too tall</li><li>Cut back to ground or thin every 2-3 years as needed</li></ul>
Noxious weeds		M (March – October, preceding seed dispersal)	Listed noxious vegetation is present (refer to current county noxious weed list)	<ul style="list-style-type: none"><li>By law, class A &amp; B noxious weeds must be removed, bagged and disposed as garbage immediately</li><li>Reasonable attempts must be made to remove and dispose of class C noxious weeds</li><li>It is strongly encouraged that herbicides and pesticides not be used in order to protect water quality; use of herbicides and pesticides may be prohibited in some jurisdictions</li><li>Apply mulch after weed removal (see "Mulch")</li></ul>

<sup>a</sup> Frequency: A = Annually; B = Biannually (twice per year); M = Monthly; W = At least one visit should occur during the wet season (for debris/clog related maintenance, this inspection/maintenance visit should occur in the early fall, after deciduous trees have lost their leaves); S = Perform inspections after major storm events (24-hour storm event with a 10-year or greater recurrence interval).  
 IPM - Integrated Pest Management  
 ISA - International Society of Arboriculture

Table 3 (continued). Maintenance Standards and Procedures for Bioretention Facilities.				
Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
Vegetation (cont'd)				
Weeds		M (March – October, preceding seed dispersal)	Weeds are present	<ul style="list-style-type: none"><li>Remove weeds with their roots manually with pincer-type weeding tools, flame weeders, or hot water weeders as appropriate</li><li>Follow IPM protocols for weed management (see "Additional Maintenance Resources" section for more information on IPM protocols)</li></ul>
Excessive vegetation		Once in early- to mid- May and once in early- to mid- September	Low-lying vegetation growing beyond facility edge onto sidewalks, paths, or street edge poses pedestrian safety hazard or may clog adjacent permeable pavement surfaces due to associated leaf litter, mulch, and soil	<ul style="list-style-type: none"><li>Edge or trim groundcovers and shrubs at facility edge</li><li>Avoid mechanical blade-type edger and do not use edger or trimmer within 2 feet of tree trunks</li><li>While some clippings can be left in the facility to replenish organic material in the soil, excessive leaf litter can cause surface soil clogging</li></ul>
	As needed		Excessive vegetation density inhibits stormwater flow beyond design ponding or becomes a hazard for pedestrian and vehicular circulation and safety	<ul style="list-style-type: none"><li>Determine whether pruning or other routine maintenance is adequate to maintain proper plant density and aesthetics</li><li>Determine if planting type should be replaced to avoid ongoing maintenance issues (an aggressive grower under perfect growing conditions should be transplanted to a location where it will not impact flow)</li><li>Remove plants that are weak, broken or not true to form; replace in-kind</li><li>Thin grass or plants impacting facility function without leaving visual holes or bare soil areas</li><li>Consultation with a landscape architect is recommended for removal, transplant, or substitution of plants</li></ul>
	As needed		Vegetation blocking curb cuts, causing excessive sediment buildup and flow bypass	<ul style="list-style-type: none"><li>Remove vegetation and sediment buildup</li></ul>
Mulch				
Mulch		Following weeding	Bare spots (without mulch cover) are present or mulch depth less than 2 inches	<ul style="list-style-type: none"><li>Supplement mulch with hand tools to a depth of 2 to 3 inches</li><li>Replenish mulch per O&amp;M manual. Often coarse compost is used in the bottom of the facility and arborist wood chips are used on side slopes and rim (above typical water levels)</li><li>Keep all mulch away from woody stems</li></ul>
Watering				
Irrigation system (if any)		Based on manufacturer's instructions	Irrigation system present	<ul style="list-style-type: none"><li>Follow manufacturer's instructions for O&amp;M</li></ul>
	A		Sprinklers or drip irrigation not directed/located to properly water plants	<ul style="list-style-type: none"><li>Redirect sprinklers or move drip irrigation to desired areas</li></ul>
Summer watering (first year)		Once every 1-2 weeks or as needed during prolonged dry periods	Trees, shrubs and groundcovers in first year of establishment	<ul style="list-style-type: none"><li>10 to 15 gallons per tree</li><li>3 to 5 gallons per shrub</li><li>2 gallons water per square foot for groundcover areas</li><li>Water deeply, but infrequently, so that the top 6 to 12 inches of the root zone is moist</li><li>Use soaker hoses or spot water with a shower type wand when irrigation system is not present<ul style="list-style-type: none"><li>Pulse water to enhance soil absorption, when feasible<ul style="list-style-type: none"><li>Pre-moisten soil to break surface tension of dry or hydrophobic soils/mulch, followed by several more passes. With this method , each pass increases soil absorption and allows more water to infiltrate prior to runoff</li></ul></li></ul></li><li>Add a tree bag or slow-release watering device (e.g., bucket with a perforated bottom) for watering newly installed trees when irrigation system is not present</li></ul>

<sup>a</sup> Frequency: A = Annually; B = Biannually (twice per year); M = Monthly; W = At least one visit should occur during the wet season (for debris/clog related maintenance, this inspection/maintenance visit should occur in the early fall, after deciduous trees have lost their leaves); S = Perform inspections after major storm events (24-hour storm event with a 10-year or greater recurrence interval).

IPM – Integrated Pest Management

ISA – International Society of Arboriculture

July 2013

Guidance Document–W. Washington Low Impact Development (LID) Operation and Maintenance (O&M)



Table 3 (continued). Maintenance Standards and Procedures for Bioretention Facilities.				
Component	Recommended Frequency <sup>a</sup>		Condition when Maintenance is Needed (Standards)	Action Needed (Procedures)
	Inspection	Routine Maintenance		
Watering (cont'd)				
Summer watering (second and third years)		Once every 2-4 weeks or as needed during prolonged dry periods	Trees, shrubs and groundcovers in second or third year of establishment period	<ul style="list-style-type: none"><li>• 10 to 15 gallons per tree</li><li>• 3 to 5 gallons per shrub</li><li>• 2 gallons water per square foot for groundcover areas</li><li>• Water deeply, but infrequently, so that the top 6 to 12 inches of the root zone is moist</li><li>• Use soaker hoses or spot water with a shower type wand when irrigation system is not present<ul style="list-style-type: none"><li>◦ Pulse water to enhance soil absorption, when feasible</li><li>◦ Pre-moisten soil to break surface tension of dry or hydrophobic soils/mulch, followed by several more passes. With this method, each pass increases soil absorption and allows more water to infiltrate prior to runoff</li></ul></li><li>• Plants are typically selected to be drought tolerant and not require regular watering after establishment; however, trees may take up to 5 years of watering to become fully established</li><li>• Identify trigger mechanisms for drought-stress (e.g., leaf wilt, leaf senescence, etc.) of different species and water immediately after initial signs of stress appear</li><li>• Water during drought conditions or more often if necessary to maintain plant cover</li></ul>
Summer watering (after establishment)		As needed	Established vegetation (after 3 years)	<ul style="list-style-type: none"><li>• Plants are typically selected to be drought tolerant and not require regular watering after establishment; however, trees may take up to 5 years of watering to become fully established</li><li>• Identify trigger mechanisms for drought-stress (e.g., leaf wilt, leaf senescence, etc.) of different species and water immediately after initial signs of stress appear</li><li>• Water during drought conditions or more often if necessary to maintain plant cover</li></ul>
Pest Control				
Mosquitoes	B, S		Standing water remains for more than 3 days after the end of a storm	<ul style="list-style-type: none"><li>• Identify the cause of the standing water and take appropriate actions to address the problem (see "Ponded water")</li><li>• To facilitate maintenance, manually remove standing water and direct to the storm drainage system (if runoff is from non pollution-generating surfaces) or sanitary sewer system (if runoff is from pollution-generating surfaces) after getting approval from sanitary sewer authority.</li><li>• Do not use pesticides or <i>Bacillus thuringiensis israelensis</i> (Bti)</li></ul>
Nuisance animals	As needed		Nuisance animals causing erosion, damaging plants, or depositing large volumes of feces	<ul style="list-style-type: none"><li>• Reduce site conditions that attract nuisance species where possible (e.g., plant shrubs and tall grasses to reduce open areas for geese, etc.)</li><li>• Place predator decoys</li><li>• Follow IPM protocols for specific nuisance animal issues (see "Additional Maintenance Resources" section for more information on IPM protocols)</li><li>• Remove pet waste regularly</li><li>• For public and right-of-way sites consider adding garbage cans with dog bags for picking up pet waste.</li></ul>
Insect pests	Every site visit associated with vegetation management		Signs of pests, such as wilting leaves, chewed leaves and bark, spotting or other indicators	<ul style="list-style-type: none"><li>• Reduce hiding places for pests by removing diseased and dead plants</li><li>• For infestations, follow IPM protocols (see "Additional Maintenance Resources" section for more information on IPM protocols)</li></ul>

<sup>a</sup> Frequency: A = Annually; B = Biannually (twice per year); M = Monthly; W = At least one visit should occur during the wet season (for debris/clog related maintenance, this inspection/maintenance visit should occur in the early fall, after deciduous trees have lost their leaves); S = Perform inspections after major storm events (24-hour storm event with a 10-year or greater recurrence interval).

IPM - Integrated Pest Management

ISA - International Society of Arboriculture



# USDA Soils Report **3**




United States  
Department of  
Agriculture

**NRCS**

Natural  
Resources  
Conservation  
Service

A product of the National  
Cooperative Soil Survey,  
a joint effort of the United  
States Department of  
Agriculture and other  
Federal agencies, State  
agencies including the  
Agricultural Experiment  
Stations, and local  
participants

# Custom Soil Resource Report for **Coos County, Oregon**

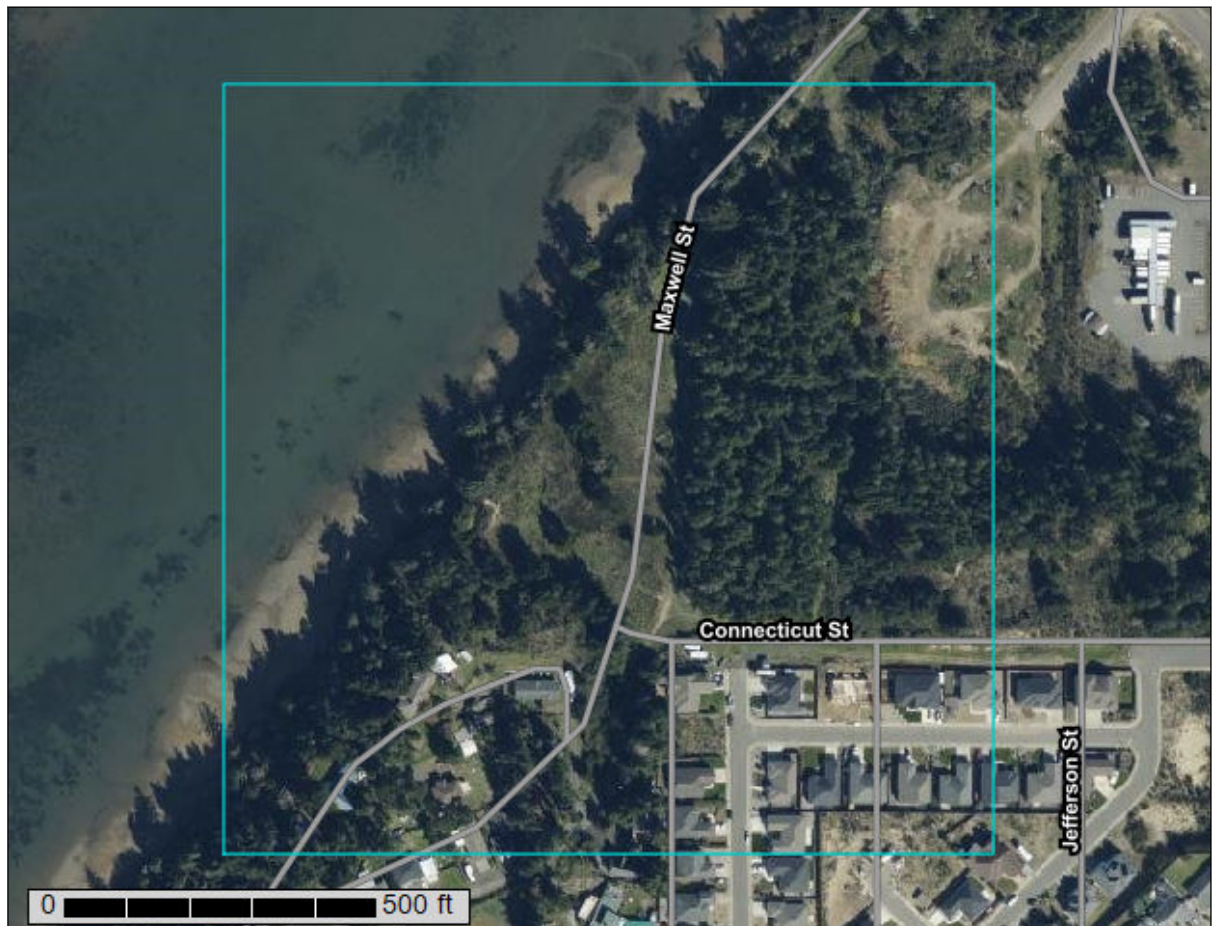

August 24, 2020

# Preface

---

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist ([http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2\\_053951](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951)).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

# Contents

---

<b>Preface</b> .....	2
<b>How Soil Surveys Are Made</b> .....	5
<b>Soil Map</b> .....	8
Soil Map (BLUFFS SUBDIVISION).....	9
Legend.....	10
Map Unit Legend (BLUFFS SUBDIVISION).....	11
Map Unit Descriptions (BLUFFS SUBDIVISION).....	11
Coos County, Oregon.....	13
28—Heceta fine sand.....	13
43D—Netarts loamy fine sand, 2 to 30 percent slopes.....	13
59D—Waldport fine sand, 0 to 30 percent slopes.....	15
W—Water.....	16
<b>Soil Information for All Uses</b> .....	17
Soil Reports.....	17
Soil Physical Properties.....	17
Engineering Properties (BLUFFS SUBDIVISION).....	17
Physical Soil Properties (BLUFFS SUBDIVISION).....	21
<b>References</b> .....	25

# How Soil Surveys Are Made

---

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

## Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and



## Custom Soil Resource Report


identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

# Soil Map

---

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.


# Custom Soil Resource Report Soil Map (BLUFFS SUBDIVISION)

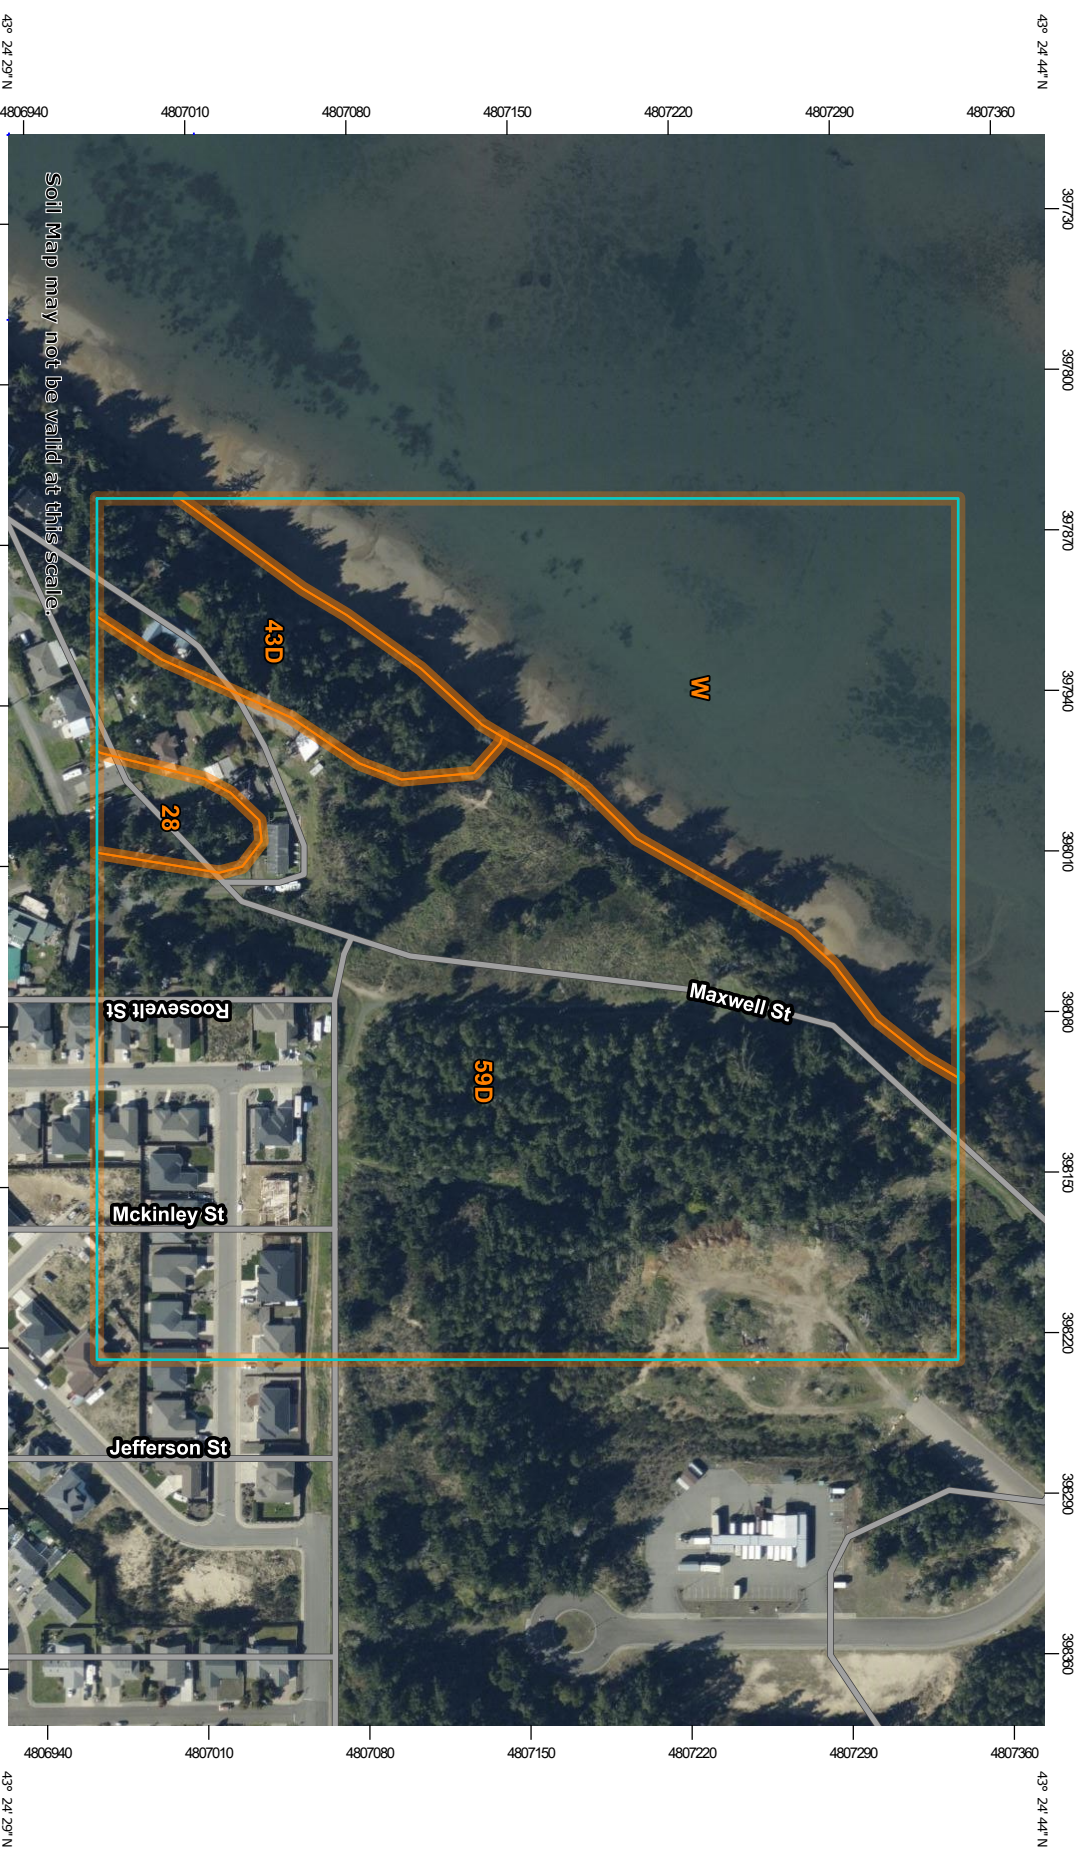

Soil Map may not be valid at this scale.

























Map Scale: 1:3,170 if printed on A landscape (11" x 8.5") sheet.

124° 15' 48" W



Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 10N WGS84

MAP LEGEND

<b>Area of Interest (AOI)</b>			Area of Interest (AOI)
<b>Soils</b>			Soil Map Unit Polygons
			Soil Map Unit Lines
			Soil Map Unit Points
<b>Special Point Features</b>			Blowout
			Borrow Pit
			Clay Spot
			Closed Depression
			Gravel Pit
			Gravelly Spot
			Landfill
			Lava Flow
			Marsh or swamp
			Mine or Quarry
			Miscellaneous Water
			Perennial Water
			Rock Outcrop
			Saline Spot
			Sandy Spot
			Severely Eroded Spot
			Sinkhole
			Slide or Slip
			Sodic Spot
<b>Water Features</b>			Streams and Canals
<b>Transportation</b>			Rails
			Interstate Highways
			US Routes
			Major Roads
			Local Roads
<b>Background</b>			Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:20,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
Web Soil Survey URL:  
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Coos County, Oregon  
Survey Area Data: Version 15, Jun 11, 2020

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Oct 5, 2019—Oct 10, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## Map Unit Legend (BLUFFS SUBDIVISION)

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
28	Heceta fine sand	0.7	1.9%
43D	Netarts loamy fine sand, 2 to 30 percent slopes	2.4	7.0%
59D	Waldport fine sand, 0 to 30 percent slopes	21.4	61.5%
W	Water	10.3	29.7%
<b>Totals for Area of Interest</b>		<b>34.9</b>	<b>100.0%</b>

## Map Unit Descriptions (BLUFFS SUBDIVISION)

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

## Custom Soil Resource Report

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

## Coos County, Oregon

### 28—Heceta fine sand

#### Map Unit Setting

*National map unit symbol:* 21n8

*Elevation:* 0 to 80 feet

*Mean annual precipitation:* 50 to 70 inches

*Mean annual air temperature:* 52 to 54 degrees F

*Frost-free period:* 200 to 240 days

*Farmland classification:* Farmland of statewide importance

#### Map Unit Composition

*Heceta and similar soils:* 80 percent

*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Heceta

##### Setting

*Landform:* Deflation basins on dunes

*Down-slope shape:* Linear

*Across-slope shape:* Linear

*Parent material:* Eolian deposits

##### Typical profile

*H1 - 0 to 4 inches:* fine sand

*H2 - 4 to 60 inches:* sand

##### Properties and qualities

*Slope:* 0 to 3 percent

*Depth to restrictive feature:* More than 80 inches

*Drainage class:* Poorly drained

*Capacity of the most limiting layer to transmit water (Ksat):* High to very high (5.95 to 19.98 in/hr)

*Depth to water table:* About 0 inches

*Frequency of flooding:* None

*Frequency of ponding:* Frequent

*Available water capacity:* Low (about 3.6 inches)

##### Interpretive groups

*Land capability classification (irrigated):* 4w

*Land capability classification (nonirrigated):* 4w

*Hydrologic Soil Group:* A/D

*Forage suitability group:* Poorly Drained (G004AY018OR)

*Other vegetative classification:* Poorly Drained (G004AY018OR)

*Hydric soil rating:* Yes

### 43D—Netarts loamy fine sand, 2 to 30 percent slopes

#### Map Unit Setting

*National map unit symbol:* 21p3



## Custom Soil Resource Report

*Elevation:* 0 to 200 feet  
*Mean annual precipitation:* 50 to 70 inches  
*Mean annual air temperature:* 52 to 54 degrees F  
*Frost-free period:* 200 to 240 days  
*Farmland classification:* Not prime farmland

### Map Unit Composition

*Netarts and similar soils:* 75 percent  
*Minor components:* 6 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

### Description of Netarts

#### Setting

*Landform:* Dunes  
*Down-slope shape:* Linear  
*Across-slope shape:* Linear  
*Parent material:* Eolian deposits

#### Typical profile

*Oi - 0 to 1 inches:* slightly decomposed plant material  
*H1 - 1 to 5 inches:* loamy fine sand  
*H2 - 5 to 31 inches:* fine sand  
*H3 - 31 to 61 inches:* fine sand

#### Properties and qualities

*Slope:* 2 to 30 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Well drained  
*Capacity of the most limiting layer to transmit water (Ksat):* High (1.98 to 5.95 in/hr)  
*Depth to water table:* More than 80 inches  
*Frequency of flooding:* None  
*Frequency of ponding:* None  
*Available water capacity:* Low (about 5.3 inches)

#### Interpretive groups

*Land capability classification (irrigated):* None specified  
*Land capability classification (nonirrigated):* 6e  
*Hydrologic Soil Group:* A  
*Hydric soil rating:* No

### Minor Components

#### Heceta

*Percent of map unit:* 6 percent  
*Landform:* Deflation basins on dunes  
*Down-slope shape:* Linear  
*Across-slope shape:* Linear  
*Other vegetative classification:* Poorly Drained (G004AY018OR)  
*Hydric soil rating:* Yes

## **59D—Waldport fine sand, 0 to 30 percent slopes**

### **Map Unit Setting**

*National map unit symbol:* 21q8  
*Elevation:* 0 to 120 feet  
*Mean annual precipitation:* 50 to 70 inches  
*Mean annual air temperature:* 52 to 54 degrees F  
*Frost-free period:* 200 to 240 days  
*Farmland classification:* Not prime farmland

### **Map Unit Composition**

*Waldport and similar soils:* 75 percent  
*Minor components:* 9 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

### **Description of Waldport**

#### **Setting**

*Landform:* Dunes  
*Down-slope shape:* Linear  
*Across-slope shape:* Linear  
*Parent material:* Eolian sands

#### **Typical profile**

*H1 - 0 to 7 inches:* fine sand  
*H2 - 7 to 60 inches:* fine sand

#### **Properties and qualities**

*Slope:* 0 to 30 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Excessively drained  
*Capacity of the most limiting layer to transmit water (Ksat):* Very high (19.98 to 99.90 in/hr)  
*Depth to water table:* More than 80 inches  
*Frequency of flooding:* None  
*Frequency of ponding:* None  
*Available water capacity:* Low (about 3.6 inches)

#### **Interpretive groups**

*Land capability classification (irrigated):* None specified  
*Land capability classification (nonirrigated):* 7e  
*Hydrologic Soil Group:* A  
*Hydric soil rating:* No

### **Minor Components**

#### **Heceta**

*Percent of map unit:* 9 percent  
*Landform:* Deflation basins on dunes  
*Down-slope shape:* Linear

## Custom Soil Resource Report

*Across-slope shape:* Linear

*Other vegetative classification:* Poorly Drained (G004AY018OR)

*Hydric soil rating:* Yes

### **W—Water**

#### **Map Unit Composition**

*Water:* 100 percent

*Estimates are based on observations, descriptions, and transects of the mapunit.*

# Soil Information for All Uses

---

## Soil Reports

The Soil Reports section includes various formatted tabular and narrative reports (tables) containing data for each selected soil map unit and each component of each unit. No aggregation of data has occurred as is done in reports in the Soil Properties and Qualities and Suitabilities and Limitations sections.

The reports contain soil interpretive information as well as basic soil properties and qualities. A description of each report (table) is included.

## Soil Physical Properties

This folder contains a collection of tabular reports that present soil physical properties. The reports (tables) include all selected map units and components for each map unit. Soil physical properties are measured or inferred from direct observations in the field or laboratory. Examples of soil physical properties include percent clay, organic matter, saturated hydraulic conductivity, available water capacity, and bulk density.

## Engineering Properties (BLUFFS SUBDIVISION)

This table gives the engineering classifications and the range of engineering properties for the layers of each soil in the survey area.

*Hydrologic soil group* is a group of soils having similar runoff potential under similar storm and cover conditions. The criteria for determining Hydrologic soil group is found in the National Engineering Handbook, Chapter 7 issued May 2007 (<http://directives.sc.egov.usda.gov/OpenNonWebContent.aspx?content=17757.wba>). Listing HSGs by soil map unit component and not by soil series is a new concept for the engineers. Past engineering references contained lists of HSGs by soil series. Soil series are continually being defined and redefined, and the list of soil series names changes so frequently as to make the task of maintaining a single national list virtually impossible. Therefore, the criteria is now used to calculate the HSG using the component soil properties and no such national series lists will be maintained. All such references are obsolete and their use should be discontinued. Soil properties that influence runoff potential are those that influence the minimum rate of infiltration for a bare soil after prolonged wetting and when not frozen. These properties are depth to a seasonal high water table, saturated hydraulic conductivity after prolonged wetting, and depth to a layer with a very slow water transmission

## Custom Soil Resource Report

rate. Changes in soil properties caused by land management or climate changes also cause the hydrologic soil group to change. The influence of ground cover is treated independently. There are four hydrologic soil groups, A, B, C, and D, and three dual groups, A/D, B/D, and C/D. In the dual groups, the first letter is for drained areas and the second letter is for undrained areas.

The four hydrologic soil groups are described in the following paragraphs:

*Group A.* Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

*Group B.* Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

*Group C.* Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

*Group D.* Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

*Depth* to the upper and lower boundaries of each layer is indicated.

*Texture* is given in the standard terms used by the U.S. Department of Agriculture. These terms are defined according to percentages of sand, silt, and clay in the fraction of the soil that is less than 2 millimeters in diameter. "Loam," for example, is soil that is 7 to 27 percent clay, 28 to 50 percent silt, and less than 52 percent sand. If the content of particles coarser than sand is 15 percent or more, an appropriate modifier is added, for example, "gravelly."

*Classification* of the soils is determined according to the Unified soil classification system (ASTM, 2005) and the system adopted by the American Association of State Highway and Transportation Officials (AASHTO, 2004).

The Unified system classifies soils according to properties that affect their use as construction material. Soils are classified according to particle-size distribution of the fraction less than 3 inches in diameter and according to plasticity index, liquid limit, and organic matter content. Sandy and gravelly soils are identified as GW, GP, GM, GC, SW, SP, SM, and SC; silty and clayey soils as ML, CL, OL, MH, CH, and OH; and highly organic soils as PT. Soils exhibiting engineering properties of two groups can have a dual classification, for example, CL-ML.

The AASHTO system classifies soils according to those properties that affect roadway construction and maintenance. In this system, the fraction of a mineral soil that is less than 3 inches in diameter is classified in one of seven groups from A-1 through A-7 on the basis of particle-size distribution, liquid limit, and plasticity index. Soils in group A-1 are coarse grained and low in content of fines (silt and clay). At the other extreme, soils in group A-7 are fine grained. Highly organic soils are classified in group A-8 on the basis of visual inspection.

If laboratory data are available, the A-1, A-2, and A-7 groups are further classified as A-1-a, A-1-b, A-2-4, A-2-5, A-2-6, A-2-7, A-7-5, or A-7-6. As an additional refinement, the suitability of a soil as subgrade material can be indicated by a group

## Custom Soil Resource Report

index number. Group index numbers range from 0 for the best subgrade material to 20 or higher for the poorest.

*Percentage of rock fragments* larger than 10 inches in diameter and 3 to 10 inches in diameter are indicated as a percentage of the total soil on a dry-weight basis. The percentages are estimates determined mainly by converting volume percentage in the field to weight percentage. Three values are provided to identify the expected Low (L), Representative Value (R), and High (H).

*Percentage (of soil particles) passing designated sieves* is the percentage of the soil fraction less than 3 inches in diameter based on an oven-dry weight. The sieves, numbers 4, 10, 40, and 200 (USA Standard Series), have openings of 4.76, 2.00, 0.420, and 0.074 millimeters, respectively. Estimates are based on laboratory tests of soils sampled in the survey area and in nearby areas and on estimates made in the field. Three values are provided to identify the expected Low (L), Representative Value (R), and High (H).

*Liquid limit* and *plasticity index* (Atterberg limits) indicate the plasticity characteristics of a soil. The estimates are based on test data from the survey area or from nearby areas and on field examination. Three values are provided to identify the expected Low (L), Representative Value (R), and High (H).

### References:

American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.

American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.

# Custom Soil Resource Report

Absence of an entry indicates that the data were not estimated. The asterisk "\*" denotes the representative texture; other possible textures follow the dash. The criteria for determining the hydrologic soil group for individual soil components is found in the National Engineering Handbook, Chapter 7 issued May 2007(<http://directives.sc.egov.usda.gov/OpenNonWebContent.aspx?content=17757.wba>). Three values are provided to identify the expected Low (L), Representative Value (R), and High (H).

Engineering Properties—Coos County, Oregon														
Map unit symbol and soil name	Pct. of map unit	Hydrologic group	Depth	USDA texture	Classification		Pct Fragments		Percentage passing sieve number—				Liquid limit	Plasticity index
					Unified	AASHTO	>10 inches	3-10 inches	4	10	40	200		
			In				L-R-H	L-R-H	L-R-H	L-R-H	L-R-H	L-R-H	L-R-H	L-R-H
28—Heceta fine sand														
Heceta	80	A/D	0-4	Fine sand	SM	A-2	0-0-0	0-0-0	100-100-100	100-100-100	65-73-80	20-25-30	0.5-10	NP
			4-60	Sand, fine sand, loamy sand	SM, SP-SM	A-2, A-3	0-0-0	0-0-0	100-100-100	100-100-100	50-65-80	5-18-30	0.5-10	NP
43D—Netarts loamy fine sand, 2 to 30 percent slopes														
Netarts	75	A	0-1	Slightly decomposed plant material	PT	A-8	0-0-0	0-0-0	100-100-100	100-100-100	60-75-100	50-65-90	—	—
			1-5	Loamy fine sand	SM	A-2	0-0-0	0-0-0	100-100-100	100-100-100	75-78-80	20-25-30	0.5-10	NP
			5-31	Loamy fine sand, fine sand, sand	SM, SP, SP-SM	A-2, A-3	0-0-0	0-0-0	100-100-100	100-100-100	65-73-80	0-13-25	0.5-10	NP
			31-61	Fine sand, loamy fine sand	SM, SP, SP-SM	A-2, A-3	0-0-0	0-0-0	100-100-100	100-100-100	65-73-80	0-8-15	0.5-10	NP
59D—Waldport fine sand, 0 to 30 percent slopes														
Waldport	75	A	0-7	Fine sand	SM	A-2	0-0-0	0-0-0	100-100-100	100-100-100	70-75-80	15-20-25	0.5-10	NP
			7-60	Fine sand	SM	A-2	0-0-0	0-0-0	100-100-100	100-100-100	70-75-80	15-18-20	0.5-10	NP



## Physical Soil Properties (BLUFFS SUBDIVISION)

This table shows estimates of some physical characteristics and features that affect soil behavior. These estimates are given for the layers of each soil in the survey area. The estimates are based on field observations and on test data for these and similar soils.

*Depth* to the upper and lower boundaries of each layer is indicated.

Particle size is the effective diameter of a soil particle as measured by sedimentation, sieving, or micrometric methods. Particle sizes are expressed as classes with specific effective diameter class limits. The broad classes are sand, silt, and clay, ranging from the larger to the smaller.

*Sand* as a soil separate consists of mineral soil particles that are 0.05 millimeter to 2 millimeters in diameter. In this table, the estimated sand content of each soil layer is given as a percentage, by weight, of the soil material that is less than 2 millimeters in diameter.

*Silt* as a soil separate consists of mineral soil particles that are 0.002 to 0.05 millimeter in diameter. In this table, the estimated silt content of each soil layer is given as a percentage, by weight, of the soil material that is less than 2 millimeters in diameter.

*Clay* as a soil separate consists of mineral soil particles that are less than 0.002 millimeter in diameter. In this table, the estimated clay content of each soil layer is given as a percentage, by weight, of the soil material that is less than 2 millimeters in diameter.

The content of sand, silt, and clay affects the physical behavior of a soil. Particle size is important for engineering and agronomic interpretations, for determination of soil hydrologic qualities, and for soil classification.

The amount and kind of clay affect the fertility and physical condition of the soil and the ability of the soil to adsorb cations and to retain moisture. They influence shrink-swell potential, saturated hydraulic conductivity (*K<sub>sat</sub>*), plasticity, the ease of soil dispersion, and other soil properties. The amount and kind of clay in a soil also affect tillage and earthmoving operations.

*Moist bulk density* is the weight of soil (oven-dry) per unit volume. Volume is measured when the soil is at field moisture capacity, that is, the moisture content at 1/3- or 1/10-bar (33kPa or 10kPa) moisture tension. Weight is determined after the soil is dried at 105 degrees C. In the table, the estimated moist bulk density of each soil horizon is expressed in grams per cubic centimeter of soil material that is less than 2 millimeters in diameter. Bulk density data are used to compute linear extensibility, shrink-swell potential, available water capacity, total pore space, and other soil properties. The moist bulk density of a soil indicates the pore space available for water and roots. Depending on soil texture, a bulk density of more than 1.4 can restrict water storage and root penetration. Moist bulk density is influenced by texture, kind of clay, content of organic matter, and soil structure.

*Saturated hydraulic conductivity (*K<sub>sat</sub>*)* refers to the ease with which pores in a saturated soil transmit water. The estimates in the table are expressed in terms of micrometers per second. They are based on soil characteristics observed in the field, particularly structure, porosity, and texture. Saturated hydraulic conductivity (*K<sub>sat</sub>*) is considered in the design of soil drainage systems and septic tank absorption fields.

## Custom Soil Resource Report

*Available water capacity* refers to the quantity of water that the soil is capable of storing for use by plants. The capacity for water storage is given in inches of water per inch of soil for each soil layer. The capacity varies, depending on soil properties that affect retention of water. The most important properties are the content of organic matter, soil texture, bulk density, and soil structure. Available water capacity is an important factor in the choice of plants or crops to be grown and in the design and management of irrigation systems. Available water capacity is not an estimate of the quantity of water actually available to plants at any given time.

*Linear extensibility* refers to the change in length of an unconfined clod as moisture content is decreased from a moist to a dry state. It is an expression of the volume change between the water content of the clod at 1/3- or 1/10-bar tension (33kPa or 10kPa tension) and oven dryness. The volume change is reported in the table as percent change for the whole soil. The amount and type of clay minerals in the soil influence volume change.

Linear extensibility is used to determine the shrink-swell potential of soils. The shrink-swell potential is low if the soil has a linear extensibility of less than 3 percent; moderate if 3 to 6 percent; high if 6 to 9 percent; and very high if more than 9 percent. If the linear extensibility is more than 3, shrinking and swelling can cause damage to buildings, roads, and other structures and to plant roots. Special design commonly is needed.

*Organic matter* is the plant and animal residue in the soil at various stages of decomposition. In this table, the estimated content of organic matter is expressed as a percentage, by weight, of the soil material that is less than 2 millimeters in diameter. The content of organic matter in a soil can be maintained by returning crop residue to the soil.

Organic matter has a positive effect on available water capacity, water infiltration, soil organism activity, and tilth. It is a source of nitrogen and other nutrients for crops and soil organisms.

*Erosion factors* are shown in the table as the K factor ( $K_w$  and  $K_f$ ) and the T factor. Erosion factor K indicates the susceptibility of a soil to sheet and rill erosion by water. Factor K is one of six factors used in the Universal Soil Loss Equation (USLE) and the Revised Universal Soil Loss Equation (RUSLE) to predict the average annual rate of soil loss by sheet and rill erosion in tons per acre per year. The estimates are based primarily on percentage of silt, sand, and organic matter and on soil structure and  $K_{sat}$ . Values of K range from 0.02 to 0.69. Other factors being equal, the higher the value, the more susceptible the soil is to sheet and rill erosion by water.

*Erosion factor  $K_w$*  indicates the erodibility of the whole soil. The estimates are modified by the presence of rock fragments.

*Erosion factor  $K_f$*  indicates the erodibility of the fine-earth fraction, or the material less than 2 millimeters in size.

*Erosion factor T* is an estimate of the maximum average annual rate of soil erosion by wind and/or water that can occur without affecting crop productivity over a sustained period. The rate is in tons per acre per year.

*Wind erodibility groups* are made up of soils that have similar properties affecting their susceptibility to wind erosion in cultivated areas. The soils assigned to group 1 are the most susceptible to wind erosion, and those assigned to group 8 are the least susceptible. The groups are described in the "National Soil Survey Handbook."

## Custom Soil Resource Report

*Wind erodibility index* is a numerical value indicating the susceptibility of soil to wind erosion, or the tons per acre per year that can be expected to be lost to wind erosion. There is a close correlation between wind erosion and the texture of the surface layer, the size and durability of surface clods, rock fragments, organic matter, and a calcareous reaction. Soil moisture and frozen soil layers also influence wind erosion.

Reference:

United States Department of Agriculture, Natural Resources Conservation Service.  
National soil survey handbook, title 430-VI. (<http://soils.usda.gov>)

# Custom Soil Resource Report

Three values are provided to identify the expected Low (L), Representative Value (R), and High (H).

Physical Soil Properties—Coos County, Oregon														
Map symbol and soil name	Depth	Sand	Silt	Clay	Moist bulk density	Saturated hydraulic conductivity	Available water capacity	Linear extensibility	Organic matter	Erosion factors			Wind erodibility group	Wind erodibility index
										Kw	Kf	T		
28—Heceta fine sand	In	Pct	Pct	Pct	g/cc	micro m/sec	In/in	Pct	Pct					
Heceta	0-4	-92-	-1-	3-7-10	1.20-1.30-1.40	42.00-92.00-141.00	0.05-0.06-0.07	0.0-1.5-2.9	1.0-2.5-4.0	.02	.02	5	1	250
	4-60	-90-	-2-	3-9-15	1.30-1.45-1.60	42.00-92.00-141.00	0.05-0.06-0.07	0.0-1.5-2.9	0.1-0.6-1.0	.02	.02			
43D—Netarts loamy fine sand, 2 to 30 percent slopes														
Netarts	0-1	-35-	-50-	0-15-25	0.10-0.20-0.30	42.00-373.00-705.00	0.30-0.45-0.60	—	60.0-75.0-95.0			5	2	134
	1-5	-80-	-17-	1-3-5	1.30-1.45-1.60	42.00-92.00-141.00	0.08-0.09-0.10	0.0-1.5-2.9	4.0-5.0-6.0	.24	.24			
	5-31	-96-	-1-	1-3-5	1.30-1.45-1.60	14.00-28.00-42.00	0.05-0.08-0.10	0.0-1.5-2.9	0.5-0.8-1.0	.15	.15			
	31-61	-96-	-1-	1-3-5	1.30-1.45-1.60	42.00-92.00-141.00	0.05-0.08-0.10	0.0-1.5-2.9	0.0-0.3-0.5	.02	.02			
59D—Waldport fine sand, 0 to 30 percent slopes														
Waldport	0-7	-96-	-1-	1-3-5	1.30-1.45-1.60	141.00-300.00-705.00	0.05-0.06-0.07	0.0-1.5-2.9	3.0-5.5-8.0	.02	.02	5	1	250
	7-60	-96-	-1-	1-3-5	1.30-1.45-1.60	141.00-300.00-705.00	0.05-0.06-0.07	0.0-1.5-2.9	0.0-0.3-0.5	.02	.02			
W—Water														
Water	—	—	—	—	—	—	—	—	—					

# References

---

American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.

American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.

Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.

Federal Register. July 13, 1994. Changes in hydric soils of the United States.

Federal Register. September 18, 2002. Hydric soils of the United States.

Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.

National Research Council. 1995. Wetlands: Characteristics and boundaries.

Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_054262](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262)

Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053577](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577)

Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053580](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580)

Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.

United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.

United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2\\_053374](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374)

United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelpdb1043084>

## Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2\\_054242](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242)

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053624](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624)

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. [http://www.nrcs.usda.gov/Internet/FSE\\_DOCUMENTS/nrcs142p2\\_052290.pdf](http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf)